





Pilous

Železná 9, 619 00 Brno, Czech Republic

Tel.: +420 543 25 20 10

e-mail: wood@pilous.cz, www.pilous.cz

MPO3 Log loader

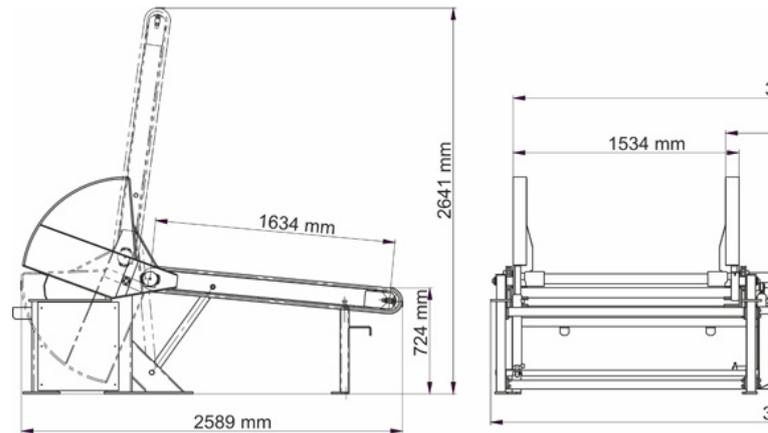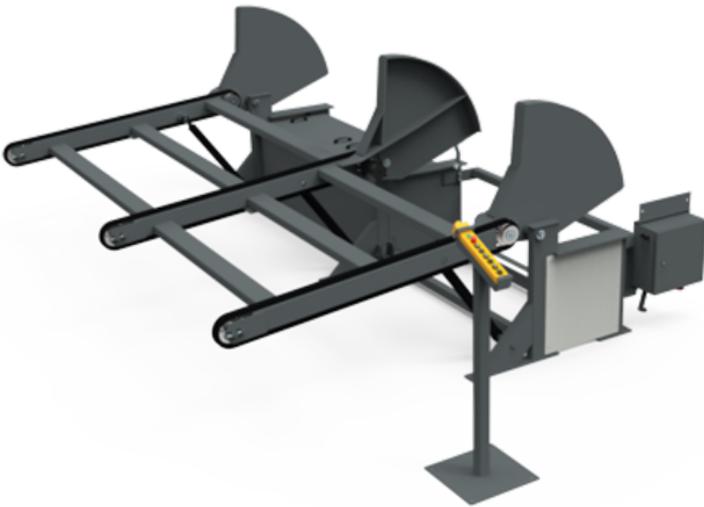

Load capacity 10 000 kg

DESCRIPTION

The tilting log loader allows fast, convenient and especially safe loading of round logs with a maximum length of 9 m onto the machine bed. Together with the log deck or when incorporated into a XMK handling line, it significantly increases the productivity of the entire operation. It is capable of handling a log with a total weight of up to 10,000 kg. The horizontal movement of the logs is carried out by means of chains that are independently controlled by hydraulic motors. The tilting angle of the arms makes it easier to load even curved, knotted logs. The loader can be easily controlled from a separate control panel by pressing the buttons. The control of individual components of the line can be combined into a larger control panel according to the customer's requirements. Depending on preferences, this unit needs to be retrofitted with a loader support that defines the lower position – see accessories.

PHOTOGALLERY



ACCESSORIES

ACCESSORIES – SPECIAL ACCESSORIES



PMP3

PMP3 Simple loader support

It defines the lower position of the log loader. It is designed to connect to a sawmill.



OPM - L

OPM-L Control panel

Extended version of the basic control panel including a switchboard. It allows you to control multiple components of the XMK line.



OPM - XL

OPM-XL Control panel

Extended version of the basic control panel including a switchboard. It allows you to control multiple components of the XMK line.

