

OFFER LIST




Pilous

Železná 9, 619 00 Brno, Czech Republic

Tel.: +420 543 25 20 10

e-mail: wood@pilous.cz, www.pilous.cz

ZKN Log deck

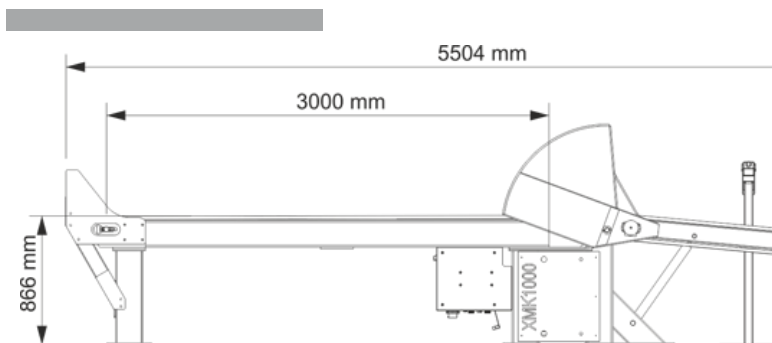


Load capacity 15 000 kg

DESCRIPTION

The driven ZKN log deck (3 m long, 2 m wide) allows transportation of logs with a maximum length of up to 9 m to the MPO log loader. Together with the log loader, it significantly increases the productivity of the entire cutting process and reduces secondary handling times to a minimum. It is capable of handling logs with a total weight of up to 15,000 kg. The horizontal movement of the logs is carried out by means of chains that are independently controlled by hydraulic motors. For safety reasons, we recommend fitting the end of the loader with ZAK stops (see accessories). The log deck can be equipped with a three-meter extension section with separate hydraulic motors. The deck can be easily controlled from a separate control panel by pressing the buttons. The control of individual components of the line can be combined into a larger control panel according to the customer's requirements. If required to increase load capacity and rigidity, the system can be provided with an additional support (see accessories).

PHOTOGALLERY

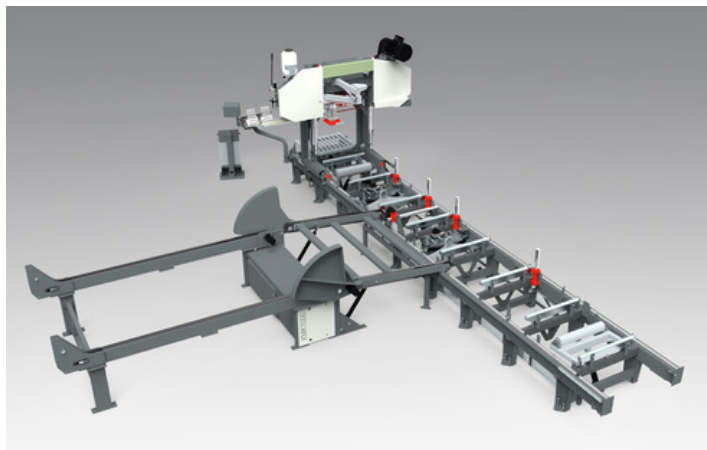

ACCESSORIES

ACCESSORIES – SPECIAL ACCESSORIES



ZAK

ZAK Log stop

It prevents logs from falling out of the deck accidentally. It is recommended as an end stop for every log deck.



ZKN/MNY support

ZKN/MNY Support

Support for increasing the load capacity (approx. 5 t), stiffness and stability of the log deck. By using the support, the dynamic load of the deck and thus its service life will be significantly increased.



Sekce ZKN/MNY

ZKN/MNY Extending section

Three-meter powered extending section with separate hydraulic motors. For safety reasons, we recommend providing the end of the loader with ZAK stops; see accessories.

